


Glands and Collars are included on both connection sides
add -WO to the part number to exclude Glands and Collars

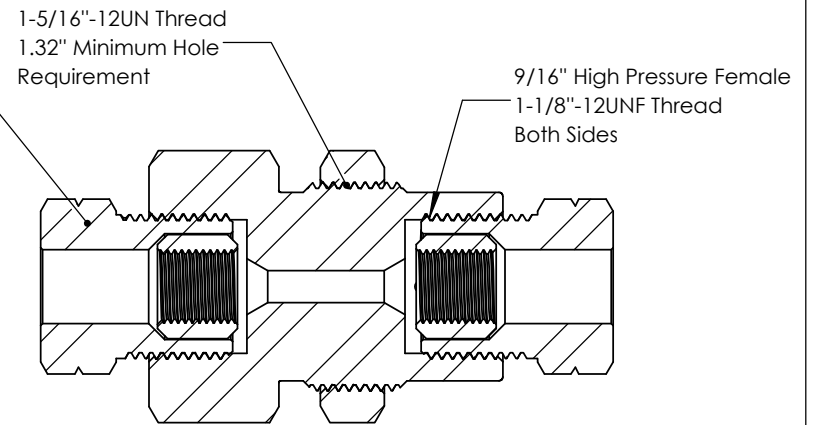

SECTION A-A

UNLESS OTHERWISE SPECIFIED:

ALL DIMENSIONS ARE IN INCHES
TOLERANCES AS FOLLOWS:
1 PLACE DECIMAL (.0): ± 0.030
2 PLACE DECIMAL (.00): ± 0.020
3 PLACE DECIMAL (.000): ± 0.010
ANGLES: $\pm 2^\circ$

SURFACE FINISH: 63RMS
BREAK ALL EDGES: .010-.015
FILLETS & ROUNDS: R.015 - 0.30

THREADS UNIFIED CLASS 2A - 2B
CHAMFER THREADS 45° TO ROOT
30° CHAMFER IS OPTIONAL
FOR MALE THREADS ONLY

	NAME	DATE
DRAWN	MH	04/10/2025
CHECKED	KH	04/10/2025

DATE STARTED IN PRODUCTION:

04/10/2025



ULTRA PRESSURE COMPONENTS HOUSTON, TX

TITLE:

9/16" HP Female Bulkhead
60,000 psi

SIZE A	DWG. NO. 5000-9H9H-BH	REV Y
SCALE: 1:1.5	WEIGHT: 2.19	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ULTRA PRESSURE COMPONENTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ULTRA PRESSURE COMPONENTS IS PROHIBITED.

REVISION NOTES AND DATES