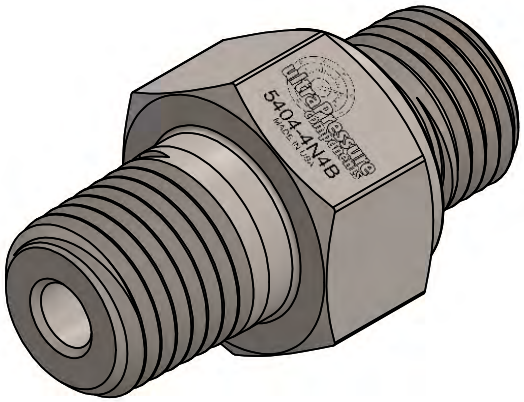


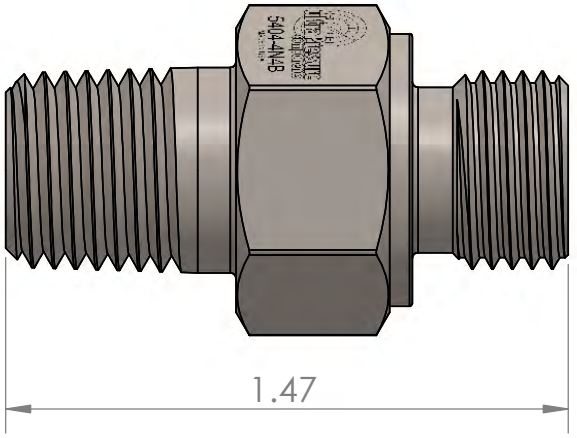


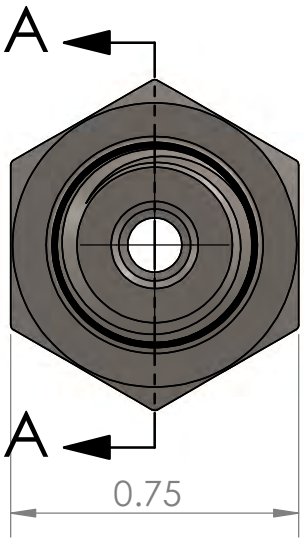


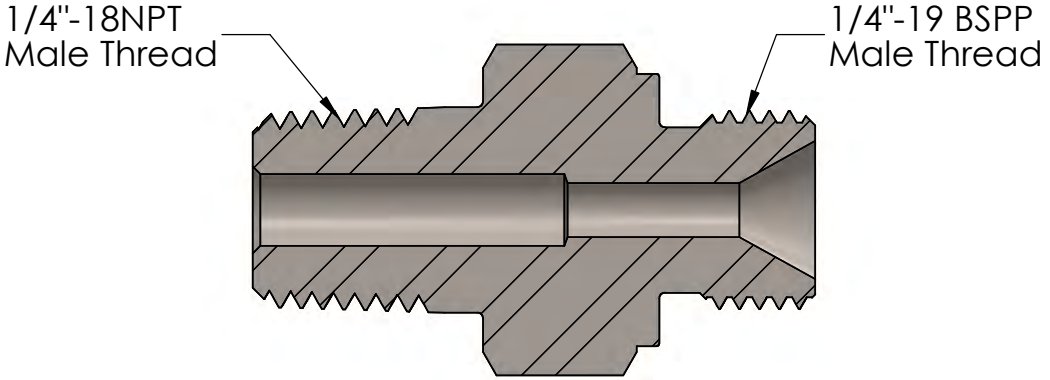


SECTION A-A

| REVISION NOTES AND DATES |
|---|
| |
| |
| |

UNLESS OTHERWISE SPECIFIED:

ALL DIMENSIONS ARE IN INCHES
TOLERANCES AS FOLLOWS:

1 PLACE DECIMAL (.0): ±.020
2 PLACE DECIMAL (.00): ±.010
3 PLACE DECIMAL (.000): ±.005
ANGLES: ±2°

SURFACE FINISH: 63RMS
BREAK ALL EDGES: .010-.015
FILLETS & ROUINDS: R.015 - 0.30

THREADS UNIFIED CLASS 2A - 2B
CHAMFER THREADS 45° TO ROOT
30° CHAMFER IS OPTIONAL
FOR MALE THREADS ONLY

| | NAME | DATE |
|---|---|---|
| DRAWN | BM | 01/20/2023 |
| CHECKED | KH | 01/20/2023 |
| DATE STARTED IN PRODUCTION: | | |
| 01/20/2023 | | |

**ULTRA PRESSURE COMPONENTS**
**HOUSTON, TX**

TITLE:

1/4" NPT MALE X 1/4" BSPP MALE
MAWP 15,000 PSI

| SIZE | DWG. NO. | REV |
|---|---|---|
| A | 5404-4N4B | Y |
| SCALE: 2:1 | WEIGHT: 0.10 | SHEET 1 OF 1 |

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ULTRA PRESSURE COMPONENTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ULTRA PRESSURE COMPONENTS IS PROHIBITED.

5 4 3 2 1