


HPC600 Male
per MASTER_HPC600

1/2"-14 NPT Female
per MASTER_8NF

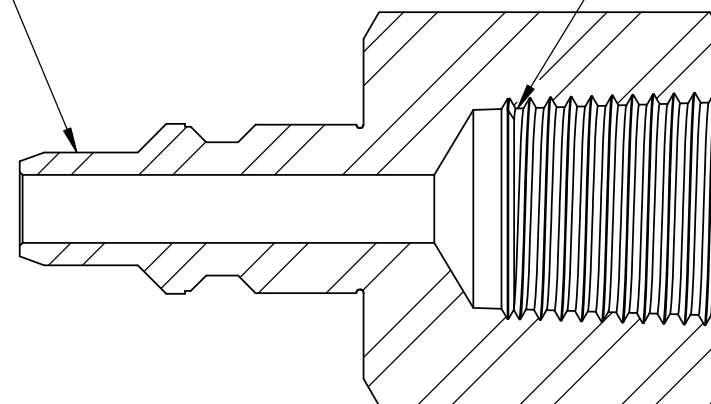

SECTION A-A

UNLESS OTHERWISE SPECIFIED:

- 1) DIMENSIONS ARE IN INCHES
- 2) TOLERANCES:
FRACTIONAL $\pm 1/64"$
ANGULAR: MACH $\pm 2^\circ$
ONE PLACE DECIMAL $\pm .020$
TWO PLACE DECIMAL $\pm .010$
THREE PLACE DECIMAL $\pm .005$
- 3) THREADS UNIFIED CLASS 2A - 2B
- 4) SURFACE FINISH 63 μ in Ra
- 5) CHAMFER THREADS:
MALE - 30° TO ROOT
FEMALE - 45° TO ROOT

	NAME	DATE
DRAWN	MH	9/7/2017
CHECKED	KH	9/7/2017

DATE STARTED IN PRODUCTION:

9/7/2017



**ULTRA PRESSURE COMPONENTS
HOUSTON, TX**

TITLE:

HPC600 Nipple x 1/2" NPT Female
15,000 psi

SIZE	DWG. NO.	REV
A	HPC600-1-8NF	Y

SCALE: 1.5:1 WEIGHT: 0.38 SHEET 1 OF 1

REVISION NOTES AND DATES

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ULTRA PRESSURE COMPONENTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ULTRA PRESSURE COMPONENTS IS PROHIBITED.