

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF


ULTRA PRESSURE COMPONENTS. ANY


ULTRA PRESSURE COMPONENTS IS

PROHIBITED.

REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF

5

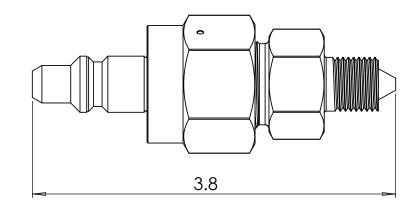



HPC 600 Nipple

1/4" High Pressure Male
9/16"-18UN Thread

SECTION A-A

	UNLESS OTHERWISE SPECIFIED:	
	ALL DIMENSIONS ARE IN INCHES	
DEVISION NOTES AND DATES	TOLERANCES AS FOLLOWS:	
revision notes and dates	1 PLACE DECIMAL (.0): ±.030	
	2 PLACE DECIMAL (.00): ±.020	
	3 PLACE DECIMAL (.000): ±.010	
	ANGLES: ±2°	
	SURFACE FINISH: 63RMS	
	BREAK ALL EDGES: .010015	
	FILLETS & ROUINDS: R.015 - 0.30	
	THREADS UNIFIED CLASS 2A - 2B	
	CHAMFER THREADS 45° TO ROOT	

HPC600 Nipple x 1/4" HP Male 30,000 psi

ULTRA PRESSURE COMPONENTS

HOUSTON, TX



SIZE		5. NO. HPC600-2-4H	IM	REV Y	
SCALE: 1:1		WEIGHT: 0.60	SHEE	SHEET 1 OF 1	

4 3 2

30° CHAMFER IS OPTIONAL

FOR MALE THREADS ONLY